



Ablux



SolidCORE®

Innovative design flooring with
integrated sound insulation



Ablux

— PODŁOGI WINYLOWE I LAMINOWANE —

SolidCORE®

... the latest generation of design flooring.


The innovative premium design floor is made with a rigid coreboard. Latest production technology fuses the decor and wearlayer to the coreboard. Attached high grade sound insulation pad - excellent reduction of up to 20 dB.

This new developed premium product offers the following specific properties.

- water resistant
- high durability
- low installation thickness
- easy maintenance
- reusable
- fully recyclable
- suitable for warm water underfloor heating

The authentic decors of the SolidCORE® reflect a real wood appearance. This natural look becomes more expressive with a natural grained textured surface. Thanks to the patented locking system, the flooring can be installed fast, clean and easy.

Product composition

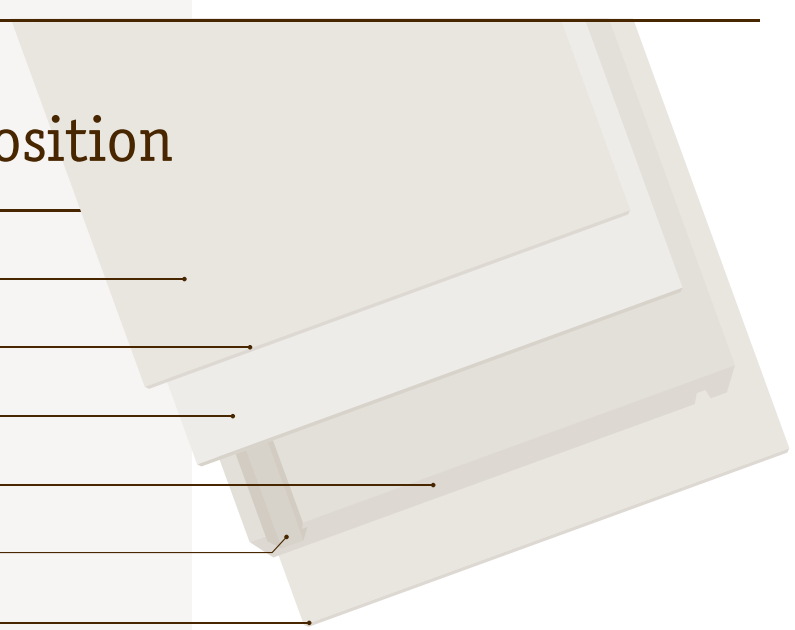- 
- PU-sealing _____
- Wear layer _____
- Printfilm _____
- Rigid coreboard _____
- Patented click system _____
- Integrated sound insulation _____

Laying technologies

The patented L2C and DropDown click systems convince with their simple angle mechanism, in which the planks are quickly, cleanly and easily inserted into each other.



SolidCORE® Collectionen

Collection

SolidCORE® 4.5 x 181 x 1.220 mm

LIVING



Collection

SolidCORE® 5.5 x 181 x 1.220 mm

X-TREME



Collection

SolidCORE® 5.5 x 225 x 1.220 mm

X-CELLENT



Collection

SolidCORE® 5.5 x 225 x 1.800 mm

X-CLUSIVE



Collection

SolidCORE® 5.5 x 470 x 940 mm

BRICK-DESIGN







Collection
SolidCORE®
X-CELLENT



Collection
SolidCORE®
BRICK-DESIGN



Collection
SolidCORE®
X-CLUSIVE

COLLECTION

SolidCORE®

LIVING

10 dekors | 4.5 x 181 x 1,220 mm



614 01

OAK AGAVE



614 02

OAK VERA



614 03

PINE IRIS



614 04

PINE JASMIN



614 05

PINE NERINE

Also
available as
adhesive plank
or with HDF
backing!



PINE NIGELLA

614

06



OAK OKRA

614

07



OAK PIMENT

614

08



OAK SAFRAN

614

09



OAK SANTINI

614

10

COLLECTION

SolidCORE®

X - T R E M E

14 dekors | 5.5 x 181 x 1,220 mm



610 **01** S5 OAK LOTUS



610 **02** S5 OAK PETUNIA



610 **03** S5 OAK CAMELIA



610 **04** S5 OAK LINEA



610 **05** S5 OAK MALVE



610 **06** S5 OAK GINGER



610 **07** S5 OAK VIOLA

Also
available as
adhesive plank
or with HDF
backing!



OAK HASEL

610

08

S5



OAK YOLA

610

09

S5



OAK CALLA

610

10

S5



OAK STAHL

610

11

S5



OAK HERBA

610

12

S5



OAK ARNICA

610

17

S5



OAK ENZIAN

610

18

S5

COLLECTION
SolidCORE®
X - C E L L E N T

12 dekors | 5.5 x 225 x 1,220 mm



07

619 OAK SOPHORA



09

619 OAK GENISTA



10

619 OAK TOONA



11

619 OAK CISTUS



12

619 OAK FIGUS



13

619 OAK LINDERA



Wood embossing with Matecta®
Surface protection



OAK PICEA

619

14



OAK ILEX

619

15



OAK ERICA

619

16



OAK PYRUS

619

17



OAK PISTASIA

619

18



OAK FORSYTHIA

619

19

COLLECTION

SolidCORE®

X - C L U S I V E

8 dekors | 5.5 x 225 x 1,800 mm



617
01

OAK MELIA



617
02

OAK MORUS



617
03

OAK TILIA



617
04

OAK FAGUS



OAK CASSIA

617



PINIE DAPHNE

617



PINIE OLEA

617



OAK PIERIS

617

COLLECTION

SolidCORE®
BRICK - DESIGN

8 dekors | 5.5 x 470 x 940 mm



CEMENT LIGHT 616

01



CONCRETE GREY 616

02



CONCRETE SAND 616

03



CONCRETE WHITE 616

04



Stone embossing with **Matecta®**
Surface protection

Also as
adhesive tile
available!




SLATE STONE 616

05



CEMENT DARK GREY 616

06

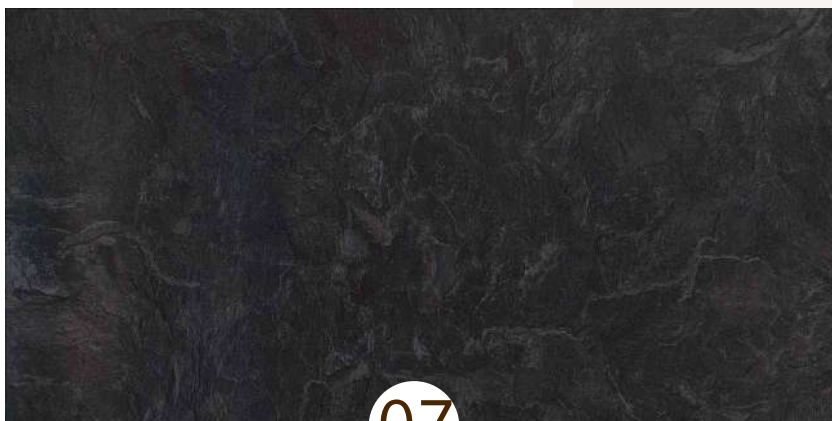

SLATE BLACK 616

07



CERAMIC STEEL 616

08



Ablux

Technical data

Installation:
Locking system:

Fire behaviour:
Footfall sound absorption: 20 dB
Thermal transmittance: 0.031 (m²K)W

Underfloor heating:

Packaging units:

Installation:
Locking system:

Fire behaviour:
Footfall sound absorption: 20 dB
Thermal transmittance: 0.038 (m²K)W

Underfloor heating:

Packaging units: 1 pack = 10 planks = 2.208 m²

SolidCORE

Cover type
According to MMFA: 2
Plank format (L x B): 1,800 mm x 225 mm
Thickness of element: 5.5 mm
Wear layer: 0.5 mm
Utilisation class: 33/42*
Weight: 9.4 kg/m²
Installation: floating
Locking system: DropDown System
Dimension stability: 0.01 % across
Slip resistance level: R10
Fire behaviour: Bfl - S1
Footfall sound absorption: 20 dB
Thermal transmittance: 0.038 (m²K)W
Thermal conductivity: 0.145 W/(mK)
Underfloor heating: suitable for installation on warm water underfloor heating
Packaging units: 1 pack = 6 planks = 2.43 m²
1 pal. = 39 pack = 94.77 m²

Cover type
According to MMFA: 2
Plank format (L x B): 940 mm x 470 mm
Thickness of element: 5.5 mm
Wear layer: 0.5 mm
Utilisation class: 33/42*
Weight: 9.4 kg/m²
Installation: floating
Locking system: DropDown System
Dimension stability: 0.01 % across
Slip resistance level: R10
Fire behaviour: Bfl - S1
Footfall sound absorption: 20 dB
Thermal transmittance: 0.038 (m²K)W
Thermal conductivity: 0.145 W/(mK)
Underfloor heating:
Packaging units:

SolidCORE

Cover type

Installation:
Locking system:

Fire behaviour:
Footfall sound absorption: 20 dB
Thermal transmittance: 0.038 (m²K)W

Underfloor heating:

Packaging units:

MATECTA®Premium

Zachowanie elektrostatyczne zgodnie z EN 1815:2016 dotyczy wszystkich pokryw 0,1KV